


## TECHNICAL DATASHEET MO23216



## coverguard

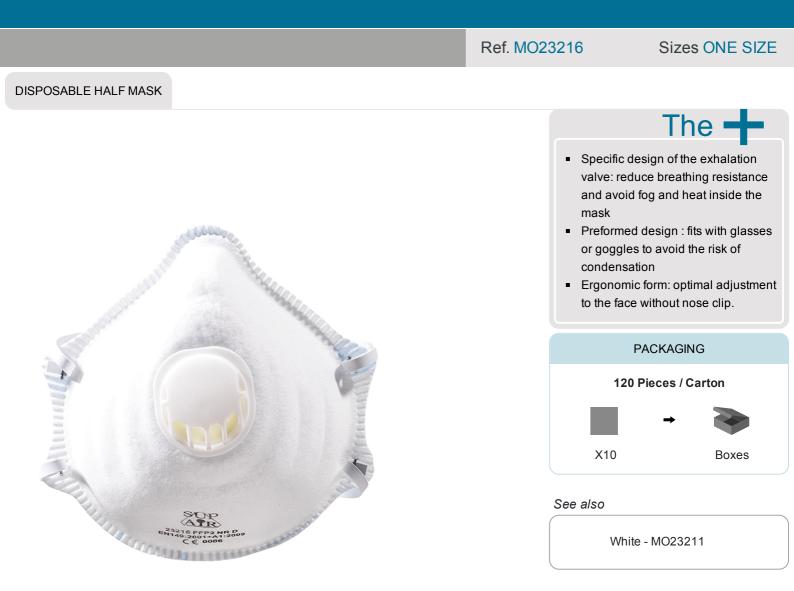

TECHNICAL FEATURES			
Weight	15 g	Features	Half-mask in nonwoven polypropylene end polyester with exhalation valve PU foam nose seal Latex free synthetic rubber band
Fields of application	For occasional use in a very dusty environment. Protections against non-toxic solid and liquid aerosols, such as calcium carbonate, kaolin, cement, cellulose, sulfur, cotton, flour, coal, ferrous metals, vegetable oils and tender woods. Textile industry, craft industry, metallurgical industry, mining industry, underground civil engineering, woodwork (strong woods excepted).	Subfamily	Preformed shell mask with valve

## LEGISLATION

This equipment conforms to the personal protective equipment model covered by the EC type-examination certificate **697918**. Delivered by **BSI (86)**.

EN149:2001+A1:2009

FFP2 NR D

Particle filtering half masks

Retailer stamp

UPDATE 03/31/2020