


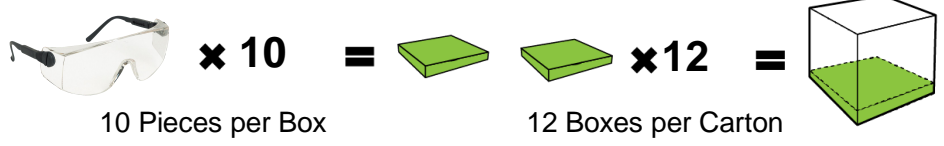




| | |
|---------------|----------------------------------|
| Temple | Nylon |
| Lens | Polycarbonate, thickness: 2,4 mm |
| Weight | 39 g |

| Reference | Frame Colour | Lens Colour | Features | Frame Marking | Lens Marking | Lens Norms |
|--|--------------|-------------|-------------|---------------|--------------|---------------|
|  60330 | Navy blue | Clear | Hard coated | F | 2-1,2 1FK | EN 170 |
|  60332 | Navy blue | Clear | Anti-fog | F | 2-1,2 1FN | EN 170 |
|  60336 | Navy blue | Yellow | Hard coated | F | 2-1,2 1FK | EN 170 |

Packaging & Storing



120 Pieces in 1 Carton

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

Product Standards



This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 0776
Delivered by INSPEC (notified body n° 0194)**



This model is in conformity with the standard EN 166:2001

General Norms & Explanation

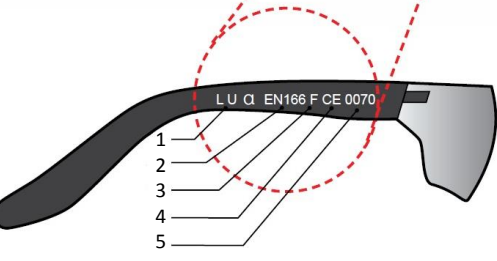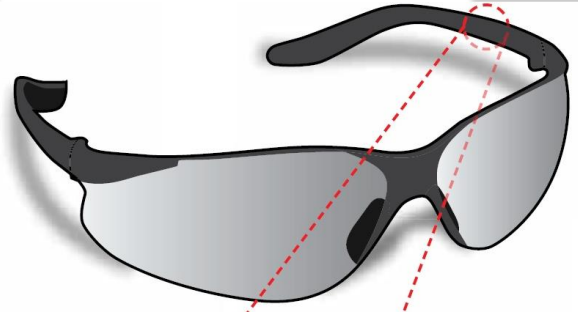

- i. Code N°
- ii. Protection class
- iii. Manufacturer
- iv. Optical Class
- v. Mechanical Resistance Certification Marking

| | | | |
|------------|--|---|---|
| EN 166 | Specification (optical quality, resistance to usual and mechanical risks and to impacts) | Temperature between -5° (± 2°) & 55° (± 2°) | T |
| EN 169 | Welding Filters | Hard coated lens | K |
| EN 170 | Ultraviolet filters | Anti-fog coated lens | N |
| EN 172 | Sunglare filters for industrial use | Protection against liquids | 3 |
| EN 175 | Welding equipments | Enhanced solidity | S |
| EN 379 | Welding filters with variable shade or dual shade | Protection against big dusts | 4 |
| EN 1731 | Mesh faceshield | | |
| EN 12312-1 | Sunglasses and related eyewear : Sunglasses for general use | | |