




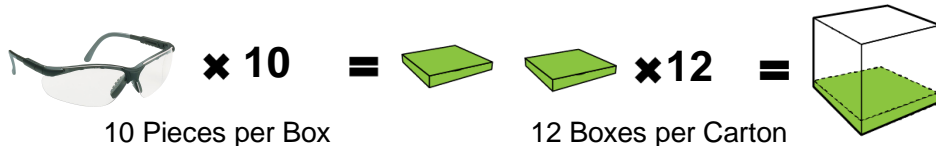




Frame	Polycarbonate, anti-slip nose piece
Temple	Polycarbonate
Lens	Polycarbonate, thickness: 2,3 mm
Weight	29.2 g

Reference	Frame Colour	Lens Colour	Features	Frame Marking	Lens Marking	Lens Norms
 60530	Black/Silver	Clear	Hard coated	F	2-1,2 1FK	EN 170
 60532	Black/Silver	Clear	Anti-fog	F-CAT.0	2-1,2 1FKN	EN 12312, EN 170
 60533	Black/Silver	Smoke	Hard coated	F	5-3,1 1FK	EN 172
 60538	Black/Silver	Clear	Hard coated	FH-AT.0	2-1,2 1FK	EN 12312, EN 170
 60539	Black/Silver	Dark smoke	Hard coated	FH-CAT.4	5-4,1 1FK	EN 12312, EN 172

Packaging & Storing



120 Pieces in 1 Carton

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

Product Standards


This article is in conformity with the model of individual safety equipment which correspond to

**The CE Type-examination certificate n° 0776
Delivered by INSPEC (notified body n° 0194)**



This model is in conformity with the standard **EN 166:2001**


General Norms & Explanation

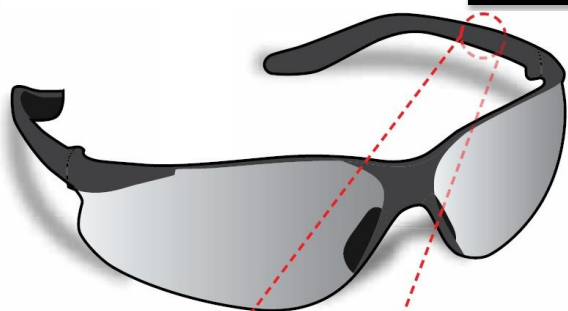

LU Q EN166 F CE 0070

- 1
- 2
- 3
- 4
- 5

1. Manufacturer
2. Standard
3. Mechanical Resistance
4. Certification
5. Notified body

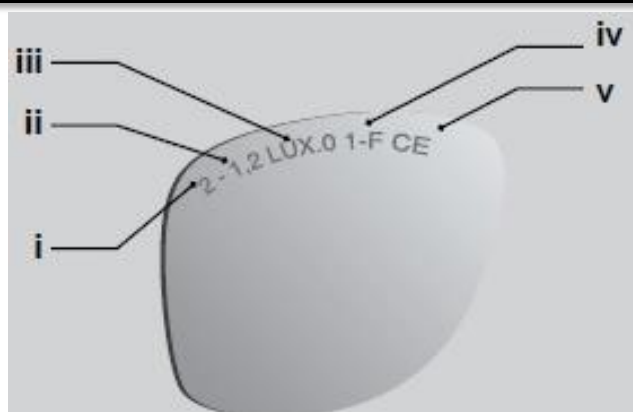

- i. Code N°
- ii. Protection class
- iii. Manufacturer
- iv. Optical Class
- v. Mechanical Resistance Certification Marking

EN 166	Specification (optical quality, resistance to usual and mechanical risks and to impacts)	Temperature between -5° (± 2°) & 55° (± 2°)	T
EN 169	Welding Filters	Hard coated lens	K
EN 170	Ultraviolet filters	Anti-fog coated lens	N
EN 172	Sunglare filters for industrial use	Protection against liquids	3
EN 175	Welding equipments	Enhanced solidity	S
EN 379	Welding filters with variable shade or dual shade	Protection against big dusts	4
EN 1731	Mesh faceshield		
EN 12312-1	Sunglasses and related eyewear : Sunglasses for general use		