




LINK CONNECTING ROPE LANYARD 1.5 M

Ref. 71201

TECHNICAL SHEET

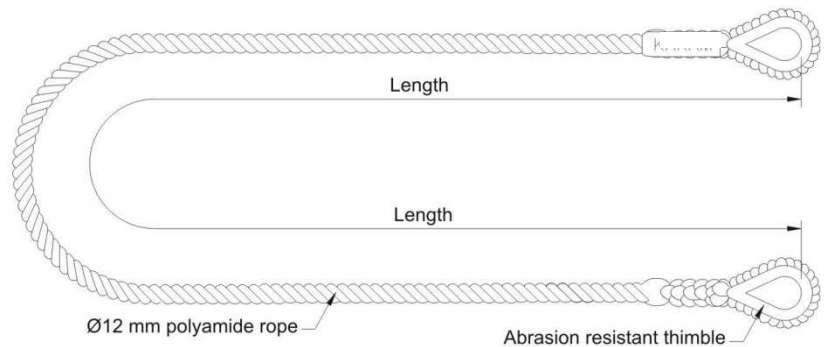

Gencode :
3435241 712011

GENERAL DESCRIPTION AND MATERIALS

- Polyamide, 3 twisted ends
- Rope Diameter : 12 mm
- Length : 1.5m
- Static strength: > 22KN
- Rope ends spliced
- 2 loops covered with polyethylene protective sleeve
- Weight : 165 g (+/-10%)
- Breaking strength minimum : 25KN

SPECIFIC ADVANTAGES

- Insertion of a green thread as an indicator of deterioration.
- 2 reinforced loops

MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Caution** : a lanyard without an energy absorber shall not be used within a fall arrestor system
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing
- Carton of 25 lanyards

STANDARDIZATION

This rope is in conformity with the model of individual safety equipment which correspond to
EN 354:2010 **The CE Type-examination certificate 2449 Issue 5 Extension 2**
Delivered by **SATRA (notified body n° 0321)**



EUROPROTECTION - 420, rue de la Dombes - 01700 MIRIBEL - FRANCE