




LINK CONNECTING LANYARD 2.0 M WITH CONNECTOR AND HOOK Ref. 71207

TECHNICAL SHEET

CE 0120

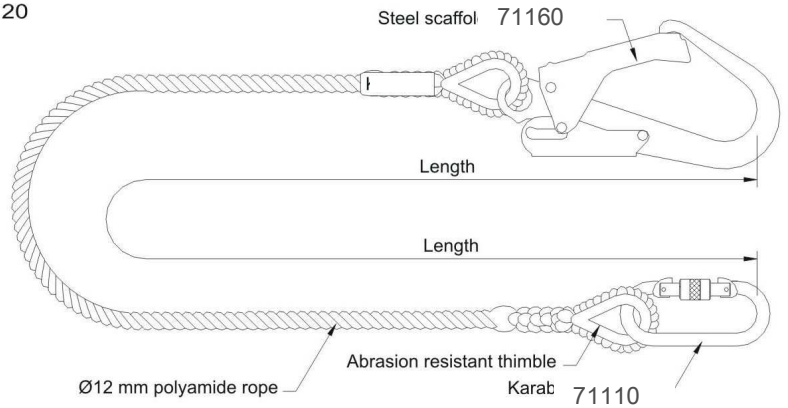

Gencode :
3435241 712073

GENERAL DESCRIPTION AND MATERIALS

- Polyamide, 3 twisted ends
- Rope Diameter : 12 mm
- Length : 2.0m
- Static strength: > 22KN
- Delivered with connector 71110 and hook 71160 (non removable)
- Rope ends **spliced and plastic-coated**
- **2 loops covered with polyethylene protective sleeve**
- Weight : **660 g** (+/-10%)
- Breaking strength minimum: 25KN

SPECIFIC ADVANTAGES

- Insertion of a green thread as an indicator of deterioration
- **2 reinforced loops**
- **Delivered with connector and hook**

MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Caution : a lanyard without an energy absorber shall not be used within a fall arrestor system**
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing
- Carton of 25 lanyards

STANDARDIZATION

This rope is in conformity with the model of individual safety equipment which correspond to **EN 354:2002**

The CE Type-examination certificate 2449 Issue 2 Extension 1



Delivered by **SATRA (notified body n° 0321)**

EUROPROTECTION – 420, rue de la Dombes – 01700 MIRIBEL – FRANCE