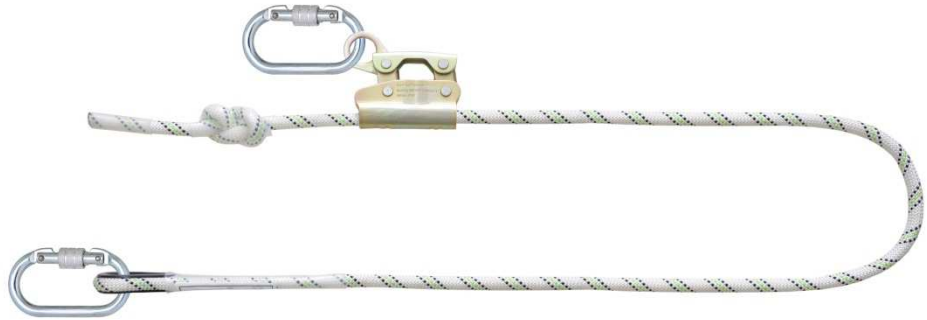


**WORK POSITIONING LANYARD 2 METERS + FALL ARRESTER + 2 CONNECTORS**

Ref. 71209

**GENERAL DESCRIPTION AND MATERIAL**

- Alpinism rope (nylon)
- Rope diameter: 12 mm
- Max length: 2.0 m
- Plastic spliced end of rope
- Weight : 1100 g (+/-10%)
- Fall arrester and connectors
- 2 connectors with screw 71110

**SPECIFIC ADVANTAGES**

- Mobile fall arrester
- Alpinism rope to guarantee high solidity and flexibility
- 1 strong buckle
- Sold with 2 connectors 71110

**MAIN APPLICATION FIELDS**

- High rise works along with a fall arrester or work positioning system
- **Warning: a webbing lanyard without energy absorber must not be used as a fall arrester system**
- Construction and civil engineering
- Dynamic resistance: maximum charge 100 Kg
- The tie between the cable and any other equipment or anchorage point must be made with certified connectors which comply with the standard EN 362

**PACKAGING**

- Individual
- Box of 25 ropes

**STANDARDIZATION**

This equipment complies with the PPE model subject to

**The EC type examination certificate 3884 Issue 2 Ext 1**

EN 358:1999

Issued by SATRA (organization n° 0321)

