




# BRAIDED ROPE 1.8 M WITH CONNECTORS AND HOOK

## Réf. 71249

### TECHNICAL SHEET

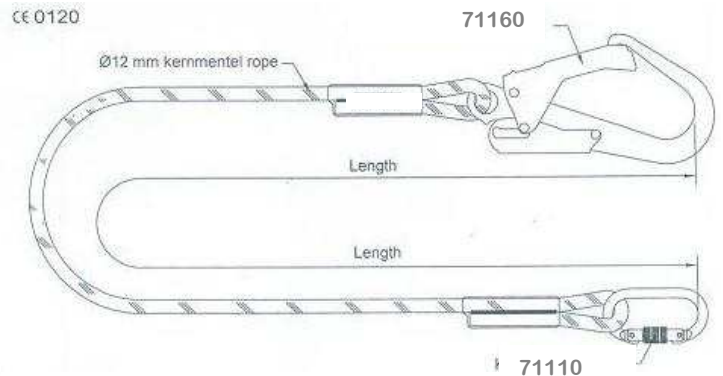

Gencode :  
3435241 712493

### GENERAL DESCRIPTION AND MATERIALS

- Weaved rope
- Rope diameter : 12 mm
- Length : 1.8 m
- Static strength : maximum 22KN
- 2 stitched plastic-coated loops covered with polyethylene protective sleeves
- Weight : 900 g (+/-10%)
- Breaking strength : maximum 22KN

### SPECIFIC ADVANTAGES

- Delivered with 1 connector 71110 and 1 hook 71160

### MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Caution** : a lanyard without an energy absorber shall not be used within a fall arrestor system
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

### PACKAGING

- Individual packing
- Carton of 25 lanyards

### STANDARDIZATION

This rope is in conformity with the model of individual safety equipment which correspond to **EN 354:2010** The CE Type-examination certificate 2577 Issue 7 Extension 1



Delivered by **SATRA (notified body n° 0321)**

**EUROPROTECTION** - 420, rue de la Dombes - 01700 MIRIBEL - FRANCE