




ENERGY ABSORBING FORKED WEBBING LANYARD Réf. 71420

TECHNICAL SHEET

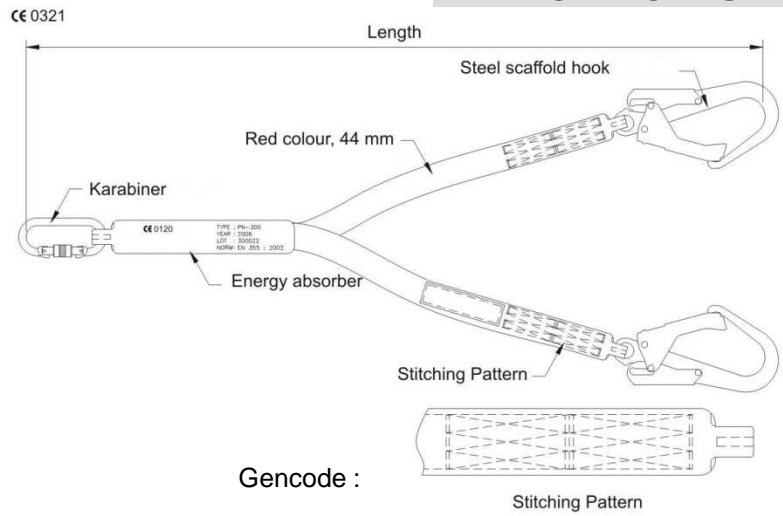

GENERAL DESCRIPTION AND MATERIALS

- 2 red weaved polyester webbing ,width : 44 mm
- energy absorber
- Total length : 1.8m
- Static strength: > 15KN
- 2 stitched textile loops with black plastic protection
- Weight : 1800 g (+/-10%)
- Breaking strength minimum : 30KN
- Minimum 6m free space from anchorage point

SPECIFIC ADVANTAGES

- 3 attachment elements
- delivered with 1 connector 71110 and 2 hooks 71160

MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing
- Carton de **10 absorbeurs d'énergie**

STANDARDIZATION

This energy absorber is in conformity with the model of individual safety equipment which correspond to **EN 355:2002** The CE Type-examination certificate 4302 Issue 4 Extension 2



Delivered by **SATRA (notified body n° 0321)**

EUROPROTECTION – 420, rue de la Dombes – 01700 MIRIBEL – FRANCE