




ENERGY ABSORBING FORKED ROPE LANYARD Réf. 71422

TECHNICAL SHEET



CE 0120

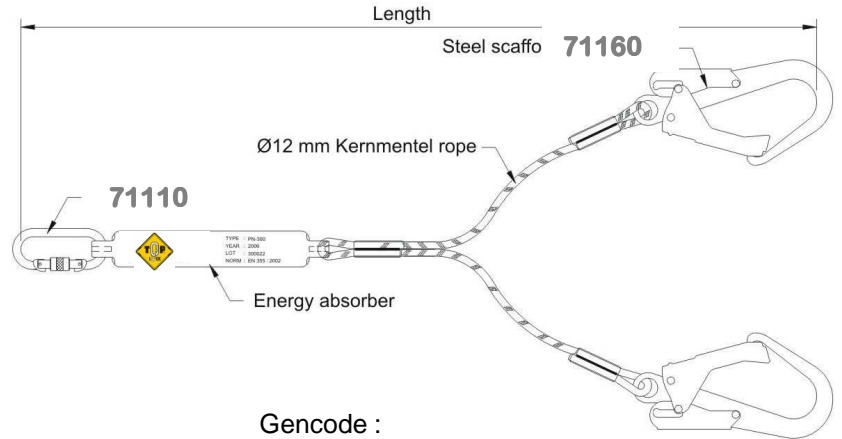

GENERAL DESCRIPTION AND MATERIALS

- 2 braided polyester rope ,
- diam : 12 mm
- energy absorber
- Total length : 1.8m
- Static strength: > 15KN
- 2 stitched plastic coated textile loops covered with polyethylene protective sleeves
- Weight : 1600 g (+/-10%)
- Breaking strength minimum : 25KN
- Minimum 6m free space from anchorage point

SPECIFIC ADVANTAGES

- 3 attachment elements
- delivered with 1 connector 71110 and 2 hooks 71160

MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing
- Carton de 10 absorbeurs d'énergie

STANDARDIZATION

This energy absorber is in conformity with the model of individual safety equipment which correspond to

EN 355:2002

The CE Type-examination certificate 4333 Issue 5 Extension 1

Delivered by SATRA (notified body n° 0321)



EUROPROTECTION - 420, rue de la Dombes - 01700 MIRIBEL - FRANCE