




# ENERGY ABSORBING EXPANDABLE WEBBING LANYARD

Réf. 71425

## TECHNICAL SHEET

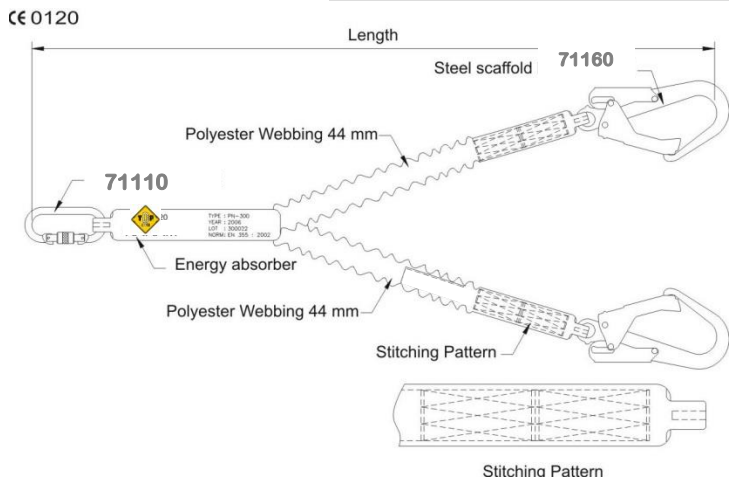

Gencode :

3435241 714251

### GENERAL DESCRIPTION AND MATERIALS

- red expandable polyester webbing ,width : 44 mm
- energy absorber
- Total length expanded: 2.0m (1.5+0.3+2x0.1m)
- Static strength: > 15KN
- 3 stitched textile loops with black plastic protection + 2 loops on the energy absorber with black plastic protection
- Weight : 1800 g (+/-10%)
- Breaking strength minimum : 30KN
- Minimum 6m free space from anchorage point

### SPECIFIC ADVANTAGES

- 3 attachment elements
- delivered with 1 connector 71110 and 2 hooks 71160

### MAIN APPLICATION FIELDS

- Job in high places in combination with a fall arrestor system or a work positioning system.
- Construction and civil engineering
- Dynamic strength: mass of 100Kg maximum
- Attachment between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

### PACKAGING

- Individual packing
- Carton of 10 energy absorbers

### STANDARDIZATION

This energy absorber is in conformity with the model of individual safety equipment which correspond to

EN 355:2002

The CE Type-examination certificate 4345 Issue 5 Extension 3



Delivered by SATRA (notified body n° 0321)