




ENERGY ABSORBING ROPE LANYARD

Réf. 71430

TECHNICAL SHEET

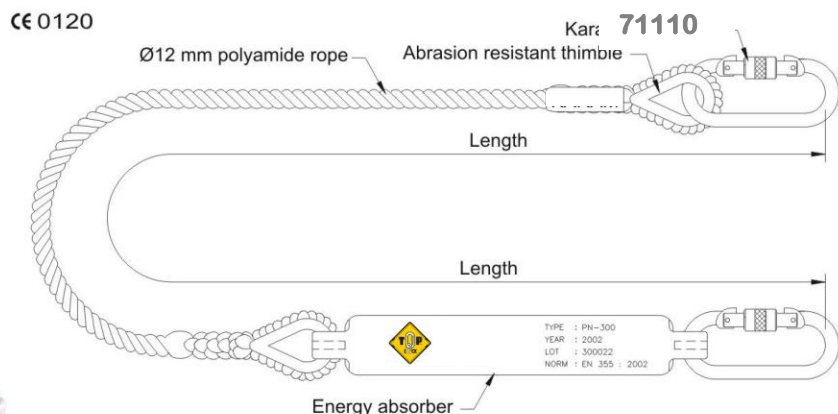

Gencode :

3435241 714305

GENERAL DESCRIPTION AND MATERIALS

- twisted polyamide rope
- energy absorber
- Rope diameter: 12mm
- Total length : 1.8m
- Static strength: > 15KN
- Minimum 6m free space from anchorage point
- 2 loops covered with polyethylene protective sleeve
- Rope ends spliced and plastic-coated
- Weight : 910 g (+/-10%)
- Breaking strength minimum : 25KN

SPECIFIC ADVANTAGES

- 2 attachment elements
- delivered with 2 connectors 71110

MAIN APPLICATION FIELDS

- Job in **high places** in combination with a **fall arrestor system** or a **work positioning system**.
- **Construction and civil engineering**
- Dynamic strength: **mass of 100Kg maximum**
- **Attachment** between this lanyard and any other equipment or anchorage point shall only be carried out with connectors in accordance with EN 362.

PACKAGING

- Individual packing
- Carton of 20 energy absorbers

STANDARDIZATION

This energy absorber is in conformity with the model of individual safety equipment which correspond to

The CE Type-examination certificate 4299 Issue 4 Extension 4

Delivered by **SATRA (notified body n° 0321)**



EN 355:2002

EUROPROTECTION - 420, rue de la Dombes - 01700 MIRIBEL - FRANCE