

ATEX FLASHLIGHT COVERGUARD

coverguard

XPERT

for a nice day




RoHS

REACH



Yellow / Black

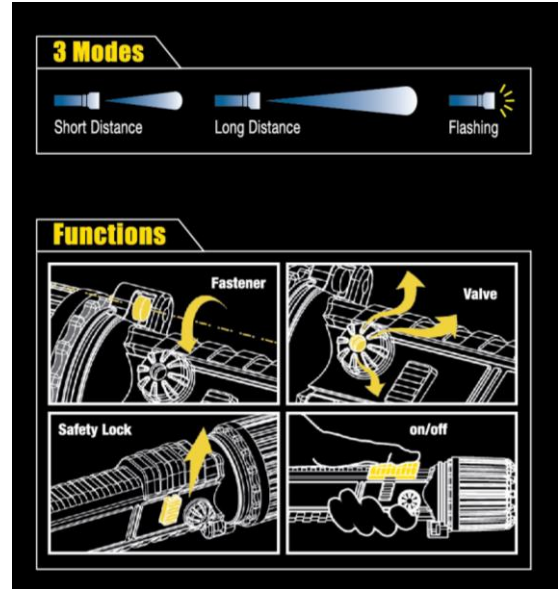

Reference

71910

General Description

	Low	High
Battery Size	4 x AA (LR6)	
Light Source	Cree XP-G LED	
Mode	Low / High / Flash	
Light Output	62 lm	157 lm
Beam Distance	83 m	117 m
Run Time	13 hrs	6 hrs 10 mins
IP Rating	IP68	
Weight	140 g	
Dimension	172 x 47 x 47mm	

WORLDWIDE EURO PROTECTION
Health & Safety Group

Packaging & Storing



× 1 =


1 piece per packaging

× 10 =

10 packaging per inner box

× 5 =

5 inner boxes per Carton



50 pieces in 1 carton

Always transport and store in the original packaging. Store in a dry place, away from direct sunbeam.

Specific Advantages

Water Resistant	Drop Resistant
Non-slip handle	High-visibility yellow color body
Waterproof for Diving	Usable in explosive atmosphere

Product Standards

This article has been certified according to the applicable norms mentioned in :

The EC Type-examination certificate n° DEMKO 13 ATEX 1205039X (Rev. 0)

Delivered by UL (notified body n° 0539)

The IECEx certificate n° IECEx UL 13.0060X (Issue 0)

Delivered by UL LLC



II 1 G Ex ia IIC T4 IP68



0539

IECEx

Ex ia IIC T4 Ga



Class I Div 1 & 2 Grp ABCD

Class II Div 1 & 2 Grp EFG

Class III Temp Code: T4