


Occupational footwear AGO High Ref. 9AGOH



Standards: 01
(no safety)
SRC

Average weight: 540g

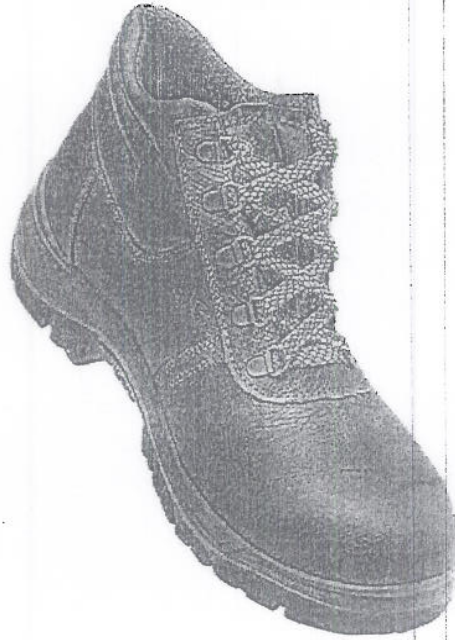

SIZES

Sizes	36	37	38	39	40	41	42
Ref.	9AGOH36	9AGOH37	9AGOH38	9AGOH39	9AGOH40	9AGOH41	9AGOH42
Gencode	3435249034368	3435249034375	3435249034382	3435249034399	3435249034405	3435249034412	3435249034429
Sizes	43	44	45	46	47	48	-
Ref.	9AGOH43	9AGOH44	9AGOH45	9AGOH46	9AGOH47	9AGOH48	-
Gencode	3435249034436	3435249034443	3435249034450	3435249034467	3435249034474	3435249034481	-

GENERAL DESCRIPTION AND MATERIALS

- Without protection
- Dual density polyurethane sole
- Synthetic rubber lining
- Non woven inner lining
- Padded black polyurethane collar
- Synthetic felt insole
- Black **grain buffalo** leather upper
- White synthetic felt lining
- Black padded full grain cow leather tongue

Outsole slip resistance

SRC = conformity SRA and SRB

Floor	Ceramic / detergent (SRA)	Steel / glycerol (SRB)
Heel part	0.53 (conformity ≥ 0.28)	0.14 (conformity ≥ 0.12)
Flat contact	0.63 (conformity ≥ 0.32)	0.16 (conformity ≥ 0.16)

Occupational footwear AGO High

Ref. 9AGOH



SPECIFIC ADVANTAGES

- Thick sole
- Sole conforming **SRC**
- **Oil and hydrocarbons resistant** sole
- High upper protecting the ankle
- High slip resistance on ceramic floor
- **Energy absorbing heel**
- **Anti-static sole**

MAIN APPLICATION FIELDS

- Sliding places
- Petroleum industries
- Working places without falling risks, collision or sole perforation

PACKAGING

- Individual box
- **10 pairs** in a box

STANDARDIZATION


This shoe is in conformity with the model of the individual safety equipment which corresponds to

The CE Type-Examination certificate LECFT00331653

Delivered by **INTERTEK (notified body n° 0362)**

EN ISO 20347:2011

CLASSE 01 FO SRC



Standard's protections :

- Closed back
- **Anti-static properties**
- **Energy absorbing heel**
- Oil resistant sole
- **Anti-slip sole**

