



HILLITE - 9HILH


39»46

S1P SRA HRO 0% Metal



| SIZE | REFERENCE |
|------|-----------|
| 39 | 9HILH39 |
| 40 | 9HILH40 |
| 41 | 9HILH41 |
| 42 | 9HILH42 |
| 43 | 9HILH43 |
| 44 | 9HILH44 |
| 45 | 9HILH45 |
| 46 | 9HILH46 |

High shoes



GENERAL DESCRIPTION


- Composite toecap
- Antipenetration textile Wellmax® sole
- External sole in Rubber
- Reinforcement : front in Nubuck
- Textile tightening loops, High shoes plastic hooks
- Padded collar
- Upper in Nubuck
- Breathable mesh lining
- Padded tongue

SPECIFIC ADVANTAGE

- Heat-resistant outsole (up to 300°C during 1 minute)
- Light shoes thanks to its composite toecap and antipenetration textile Wellmax® sole
- Antislidding outsole on ceramic floor
- Outsole resistant to hydrocarbons
- Antistatic outsole
- Energy absorbing heel

PACKAGING

10 PAIRS PER CARTON

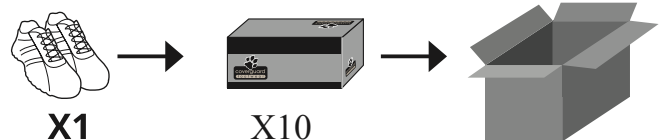

STANDARDS

This shoe is in conformity with the model of the individual safety equipment which corresponds to **LEC FI00330566**.
Delivered by **INTERTEK (notified body n° 362)**



EN ISO 20345:2011
S1P HRO SRA

For more informations, please refer to www.coverguard-footwear.com